


Note: Replacement of components on this board should be undertaken only by experienced engineers using the special de-soldering equipment (solder sipper) designed for the removal of components without damage.

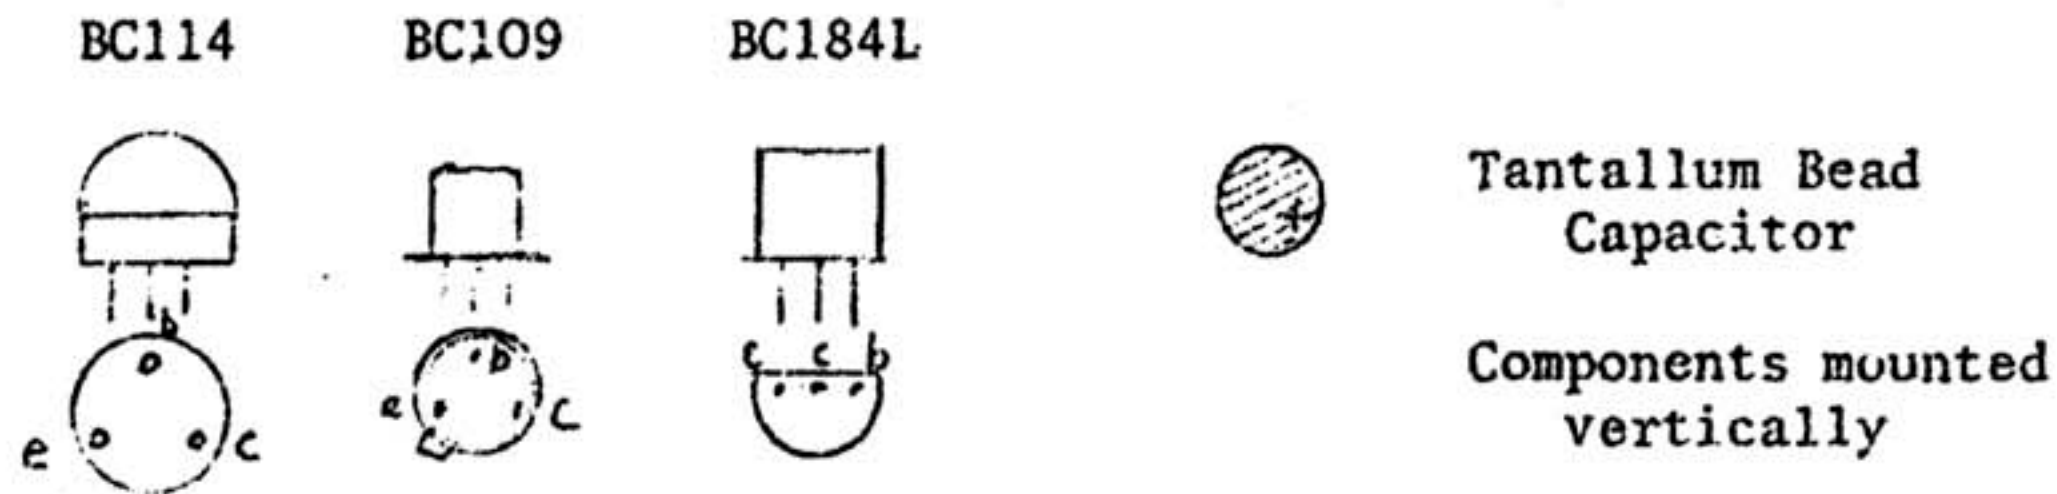

Transistors viewed from underside.

This p.c.b. consists of an input amplifier similar to that on the BA283 board together with two similar operational amplifiers.